

54 Mbps Wireless DSL Gateway

Technical Specifications (cont'd)

Power Requirements	Operating voltage: +12V DC +/-5% @ 600mA max
Setup and Management	Plug-N-Play Install Web-based Management
Regulatory Compliance	FCC Class C, Part 15 & Part 68 UL CE
Limited Warranty	One Year

Minimum System Requirements

- PC or Macintosh with Ethernet or 802.11b/802.11g wireless connection or PC with available USB port
- Microsoft Windows 98SE, Me, 2000, XP, Vista; Mac OS 9 or higher; Linux/BSD, Unix (USB: Windows 98SE, Me, 2000 XP)
- TCP/IP network protocol installed
- Internet Explorer 5.0+ or Netscape 5.0+

Package Contents

- Actiontec Wireless DSL Gateway
- Installation CD-ROM
- Quick Start Guide
- Ethernet Cable
- USB Cable
- User Manual on CD-ROM
- Power Cord
- DSL Cable

Note: Customers may request customized self-install kit configuration

Corporate Office

760N. Mary Avenue, Sunnyvale, CA 94085

Main: (408) 752-7700

Tech Support: (888) 436-0657

Sales Info: (800) 797-7001

Tech Support Fax: (719) 522-9421

Fax: (408) 541-9003

Internet: www.actiontec.com

54 Mbps Wireless DSL Gateway

With its new Wireless DSL Gateway, Actiontec moves way ahead of the competition. A completely integrated networking solution in one box (DSL modem, wireless networking, full routing capability), the Wireless Gateway solves all of your customer's connection and networking needs in one tidy little package.

Even Easier to Use

In an effort to make the Wireless DSL Gateway as uncomplicated as possible to deploy and use, the graphical user interface was redesigned from the ground up. Now it's a snap to check the status of the network or the broadband connection's IP address. Nearly all other configuration options are one or two clicks away, and the home page can be customized with specific Internet links or other online services.



Model # GT704WG

Security Comes First

The Gateway also functions as an Internet firewall, providing the home network with robust protection from outside threats, like hackers or other individuals looking to snoop in personal files. Three different levels of protection allow your customer to customize the level of security. Wireless transmissions are also protected, since the Gateway utilizes 64-, 128-, or 256-bit encryption or WPA for ironclad protection.

* Depends on the services offered by the Internet Service Provider.

© 2008 Actiontec Electronics, Inc.
Actiontec, Actiontec Installation Buddy, Connection1-2-3, Solutions for the Digital Life, Actiontec Digital Gear and the Actiontec logo are trademarks or registered trademarks of Actiontec Electronics, Inc. All other names are properties of their respective owners.
Product photo may differ from actual product, however functionality remains as stated above.
Specifications are subject to change without notice.


54 Mbps Wireless DSL Gateway

Features

- Integrated Wired and Wireless Networking using 802.11g, USB and 4 Port 10/100 Mbps Ethernet Switch
- 802.11b backward compatible, communicating with 802.11b wireless products at speeds up to 11 Mbps
- 802.11g enabled to support speeds up to 54 Mbps wirelessly
- Full-rate ADSL2+ modem – supports data rates of up to 24 Mbps downstream and up to 1 Mbps upstream*
- Exceeds performance of the DSL Forum specification
- Guaranteed loop reach of up to 18,000 feet using ADSL and 18,600 feet using ADSL2
- TRO69 compliance available via upgrade
- Tested and compatible with all major DSLAMs
- Advanced security: WPA, WPA-PSK, WEP, Firewall, Stateful Packet Inspection, NAT, website blocking, web service blocking, Internet traffic logging, Denial of service blocking, Internet traffic logging, Denial of Service (DOS) protection
- Other features include:

Auto detection of ADSL signal on inner or outer pairs (manufacturing option) Bit Swapping DHCP Server Option Compliant with DSL Forum TR048 Rate and Reach Requirements DMZ Hosting DNS Proxy Server Dynamic Rate Adaptation Independent upstream and downstream data rate provisioning LAN IP Address Selection	Mac Address Cloning Multiple PVC supported NAT Services Blocking Port Forwarding Real-time diagnostics Remote Management S=1/2 Support Services Blocking Static Routing Unnumbered Mode Support VPN Pass Through WAN IP & LAN IP Address Selection Website Blocking
--	---

Ports at Rear of Unit

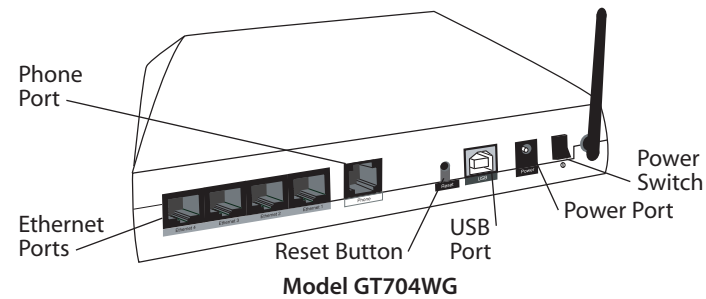

Technical Specifications

Features	Descriptions
ADSL	ITU G.992.1 (G.dmt), G.992.2 (G.Lite), G.994.1 (G.hs), G.992.3/4 (ADSL2), G.992.5 (ADSL2+) ANSI T1.413 Issue2
ATM	ATM User-Network Interface, Version 3.1, Section 3. The ATM Forum <ul style="list-style-type: none"> • The full VPI range (0 – 4095) and VCI range (1 – 65535) are supported • Adaptation Layers AAL5, AAL2 and AAL0 are supported • The traffic shaping function supports traffic classes CBR, VBR (real time and non-real time) and UBR (with PCR limiting)
OAM	ITU-T Recommendation I.610 B-ISDN "Operation and Maintenance Principles and Operations" <ul style="list-style-type: none"> • F5 segment and end-to-end loopback cells
Wireless	IEEE 802.11g IEEE 802.11b IEEE 802.1x WPA WEP 64/128/256 bit encryption SSID Broadcast enable/disable
Ethernet	ISO/IEC 8802-3; ANSI/IEEE standard 802.3 part 3 <ul style="list-style-type: none"> • IEEE 802.3x – Full Duplex capable • IEEE 802.3u – Auto negotiation RFC 1213 "Management Information Base for Network Management of TCP/IP-based Internet: MIB-II" D-I-X "The Ethernet - A Local Area Network: Data Link Layer and Physical Layer Specifications"
Bridge	Transparent MAC level bridge for Ethernet-like devices in conformance with the IEEE 802.1d specification ISO/IEC 10038:1993 (E), Std 802.1D RFC 1213 "Management Information Base for Network Management of TCP/IP-based Internet: MIB-II" RFC 1493 "Definitions of Managed Objects for Bridges"

54 Mbps Wireless DSL Gateway

Technical Specifications (cont'd)

IP	RFC 791 "Internet Protocol" RFC 950 "Internet Standard Subnetting Procedure" RFC 1122 "Requirements for Internet Hosts – Communication Layers" RFC 1191 "Path MTU discovery" RFC 1213 "Management Information Base for Network Management of TCP/IP-based Internet: MIB-II" RFC 894 "Standard for the Transmission of IP Datagrams Over Ethernet Networks"	NAT advanced features	Port Forwarding DMZ Service Blocking Web site blocking Web Activity Log
ARP	RFC 826 "Ethernet Address Resolution Protocol: Or Converting Network Protocol Addresses to 48-bit Ethernet Address for Transmission on Ethernet Hardware"	Firewall	Stateful Firewall: multiple security levels Basic IDS: Stateful Packet Inspection for prevention of Denial of Service (DoS) attacks
ICMP	RFC 792 "Internet Control Message Protocol"	Universal Plug-N-Play (UPnP)	Internet Gateway Device (IGD) Standardized Device Control Protocol V 1.0
UDP	RFC 768 "User Datagram Protocol"	PPPoA	RFC 2364 "PPP Over AAL5"
TCP	RFC 793 "Transmission Control Protocol"	PPPoE	RFC 2516 "Method for Transmitting PPP Over Ethernet (PPPoE)"
IP Router	Support Static Route Support Unnumbered Mode	RFC 1483/2684	Supports bridged 802.3 Ethernet frames over an ATM network <ul style="list-style-type: none"> • LLC encapsulation, in which an LLC/SNAP header is prepended to the (Ethernet) frame • VC multiplexing, in which a null two byte header is prepended to the frame Default is LLC encapsulation; VC multiplexing can be configured using console command or WEB configuration <ul style="list-style-type: none"> • RFC 1483 "Multiprotocol Encapsulation Over ATM Adaptation Layer 5" • RFC 1213 "Management Information Base for Network Management of TCP/IP-based Internet: MIB-II" • RFC 2684 "Multiprotocol Encapsulation Over ATM Adaptation Layer 5"
RIP	RFC 1058 "Routing Information Protocol" RFC 1723 "RIP Version 2 - Carrying Additional Information" RFC 2453 "RIP Version 2" RFC 1812 "Requirements for IP Version 4 Routers" RFC 1191 "Path MTU Discovery"	TELNET	RFC 854 "Telnet Protocol Specification" RFC 855 "Telnet Option Specifications" RFC 857 "Telnet Echo Option" RFC 858 "Telnet Suppress Go Ahead Option"
DHCP Server	RFC 2131 "Dynamic Host Configuration Protocol" RFC 2132 "DHCP Options and BOOTP Vendor Extensions"	FTP Server/Client	RFC 1350 "The TFTP Protocol (Revision 2)" FTP server is in boot loader only
DHCP Client	RFC 2131 "Dynamic Host Configuration Protocol" RFC 2132 "DHCP Options and BOOTP Vendor Extensions" The DHCP client supports the following minimal subset of options described in RFC 2132: <ul style="list-style-type: none"> • Requested IP Address (requested by default; is mandatory) • Parameter Request list (subnet-mask only) • IP Address Lease time (dhcp-lease-time) • Client-identifier (dhcp-client-identifier) • Default route (routers) • DNS proxy servers 	Web Server and Web Based Configuration	RFC 1945 "Hypertext Transfer Protocol – HTTP/1.0" RFC 2068 "Hypertext Transfer Protocol – HTTP/1.1" (partial support) RFC 2617 "HTTP Authentication: Basic and Digest Access Authentication"
NAT, PAT (IP Masquerading)	RFC 2663 "IP Network Address Translator (NAT) Terminology and Considerations" RFC 3022 "Traditional IP Network Address Translator (Traditional NAT)"	Operating Range	Indoors: Up to 13m (40 ft) @ 54 Mbps Up to 17m (55 ft) @ 18 Mbps Up to 37m (120 ft) @ 11 Mbps Up to 91m (300 ft) @ 1 Mbps Outdoors: Up to 55m (180 ft) @ 54 Mbps Up to 122m (400 ft) @ 18 Mbps Up to 171m (560 ft) @ 11 Mbps Up to 533m (1,750 ft) @ 1 Mbps
NAT ALGs (Application Level Gateway) (NAT Pass Through)	FTP (over NATP) Netmeeting IPSec PPTP	Environmental Operating Range	Operating Temperature: 0-40 degrees Celsius Humidity: 8-95% non-condensing